




Description

A 100% solids, chemical resistant epoxy grout. It is designed for situations requiring strict hygiene standards and high chemical and physical resistance.

- Superior chemical and physical resistance
- Available in Fine and Coarse grades
- Easier to wash off than other 100% solids epoxy grouts
- Solvent free and water wash up

Specifications

- **Joint Width:**
 - Coarse – 3mm to 15mm
 - Fine – 1.5mm to 15mm
- **Tile Types:**
All ceramic tiles, porcelain, natural stone
(Porous and textured tiles may require special application procedures)
- **Location:**
 - Internal
 - External*
 - Swimming and hydrotherapy pools(*Epoxy grouts are prone to chalking when used externally but performance is not affected)
- **Surfaces:**
 - Walls
 - Floors
- **Colours:**
 - Various
- **Pack Size:**
 - Mid Size Unit: 4L Part A + 2L Part B + 20kg (fine) or 2x20kg (coarse) Part C
 - Commercial Unit: 20L Part A + 10L Part B + 5x20kg (fine) or 7x20kg (coarse) Part C

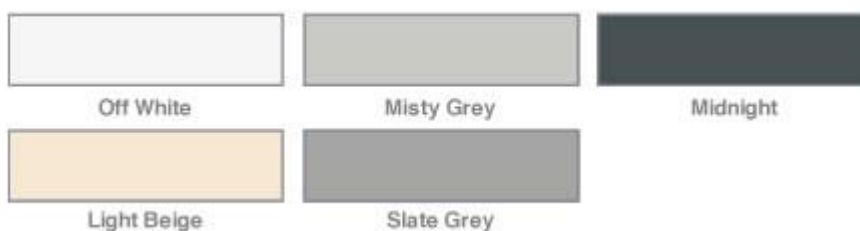



Description

A smooth, flexible cement-based grout with improved colour integrity. ARDEX FG 8 is suitable for tile joints 1-8mm wide and is exceptionally easy to use on walls and floors.

- Excellent workability
- Strong uniform colour
- Easier to use
- Smooth finish, flush joints
- Mould resistant and water repellent

Specifications

- **Joint Width:**
 - 1mm to 8mm
- **Tile Types:**

Ceramic and porcelain tiles, terrazzo, slate, quarry tiles, moisture insensitive natural stones and mosaics

- **Location:**
 - Internal
 - External(Swimming pools use No. 200 White mixed with ARDEX Grout Booster)
- **Surfaces:**
 - Floors
 - Walls
- **Colours:**
 - Various
- **Pack Size:**
 - 1.5kg
 - 5kg
 - 20kg

